

## Remote Start Replacement Steps


1. Remove the 6 10 mm bolts of control panel. Picture below.




2. Locate the RF Module Box located right behind the control panel. It is a big black box. Do not worry about damaging any wiring or your machine because the panel is wired to give enough room for these types of replacement parts. Pictures below.



Remote module

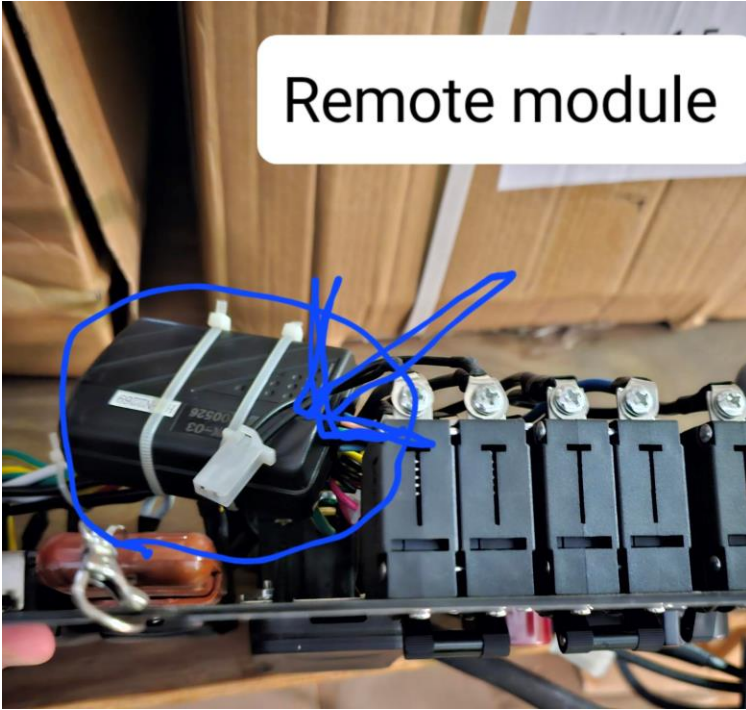

3. Unplug and plug in the new module.

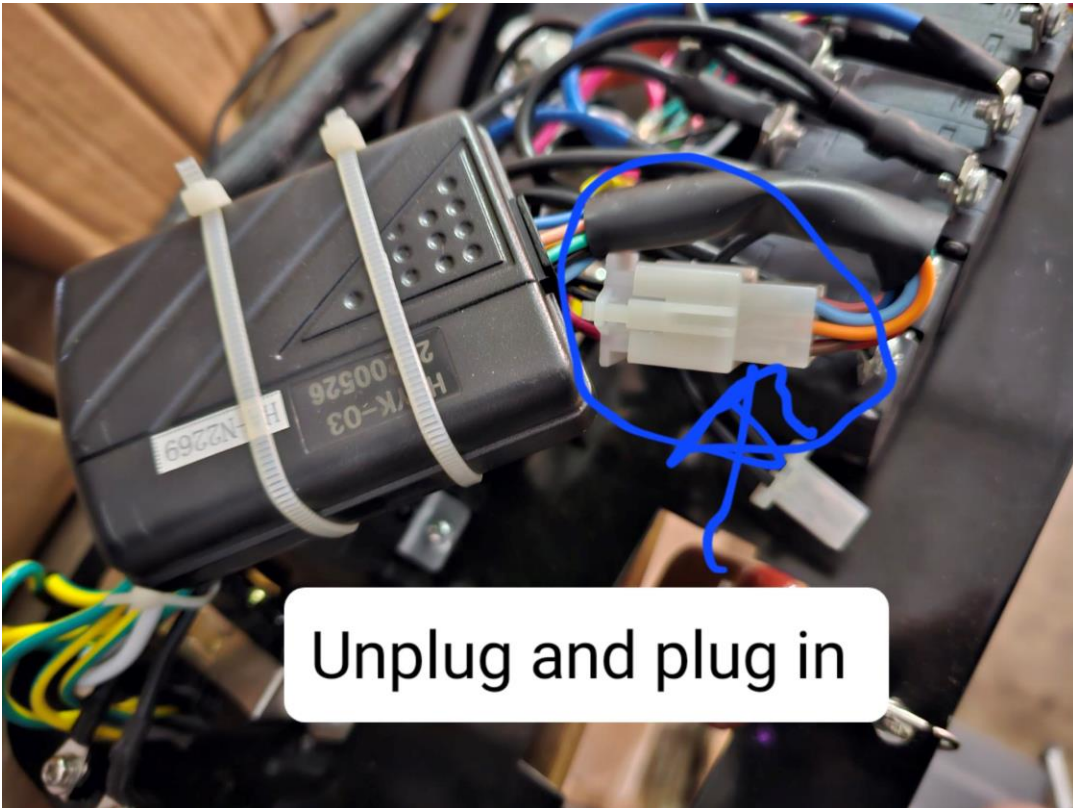

Unplug and plug in

4. Replace the 6 bolts removed in step one and you are finished. Please call AMP at 877-601-2823 if you have any questions.